

A

B



C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		NEW RELEASE	蒋建银	2018.01.23

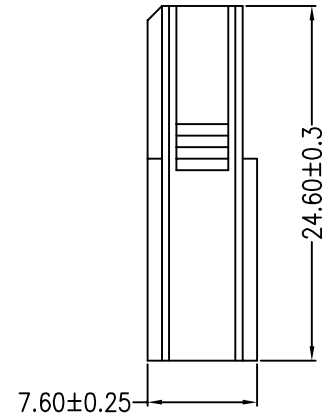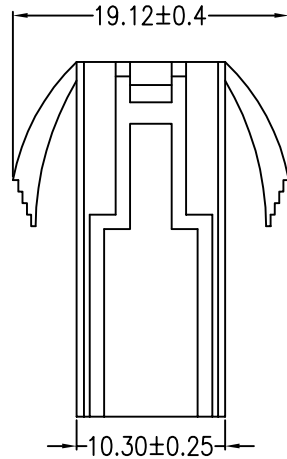

主要技术参数 Main Specifications

线数 (Poles): 02 to 08

额定电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 300 V AC DC



额定电流 (Rated current): 10A AC DC

耐电压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

C4501R-02-A5W-P	
PART No. _____	PACKAGING: P=PE
No. OF CIRCUITS: _____	PLASTIC MATERIAL: A5W=PA66 (BEIGE)
02	

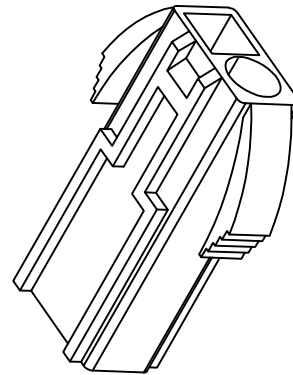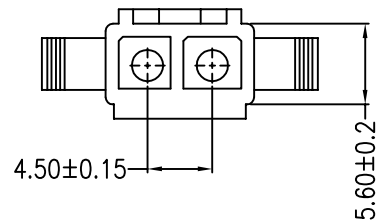

C	B	A	ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
		HOUSING			1 PCS	PA66	COLOR:(BEIGE) UL94-V2
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: C4501R		4.0mm PITCH HOUSING		
X.±0.5	X.±5'	USE:	CUSTOMER		PART NO.:		
.X±0.3	.X±2'		APPD: 邵敬和		C4501R-02-A5W-P		
.XX±0.25	.XX±1'	CHKD: 田峰	DWG NO.:		JKUN-GCCP-0613		
--	--	DR: 蒋建银	SCALE		SHEET		
		UNITS: mm	1 : 1		1 / 1		

A

B

C

D

E

F