
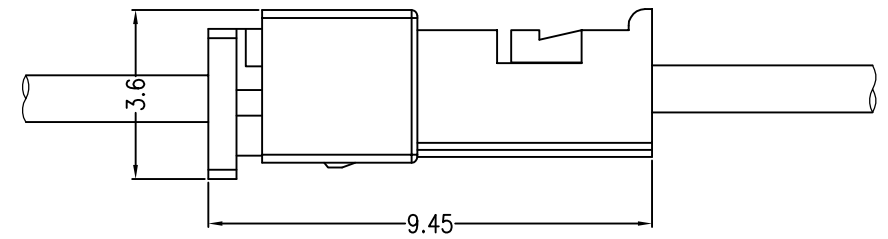
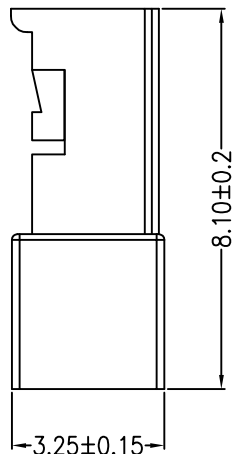


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	NEW RELEASE	蒋建银	2018.01.08



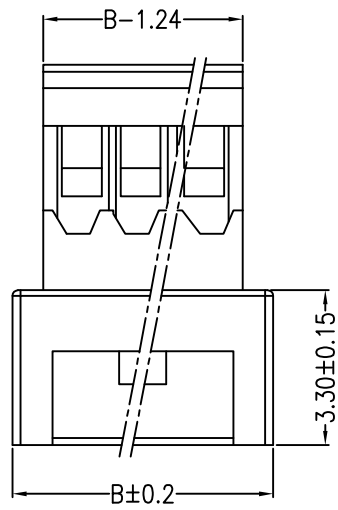


### Assembly Layout

#### 主要技术参数 Main Specifications

线 数 (Poles): 02 to 16  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$   
 额定电压 (Rated voltage): 125 V AC DC  
 额定电流 (Rated current): 1.0A AC DC  
 耐 电压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +105^{\circ}C$

#### ORDER INFORMATION:

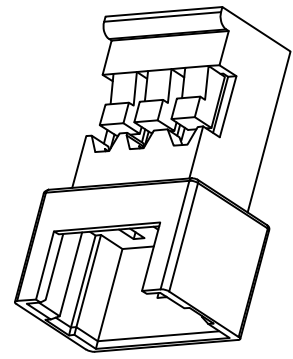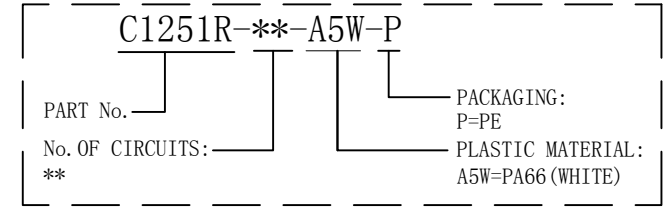

Circuits	Dimensions (mm)	
	A	B
02	1.25	4.20
03	2.50	5.45
04	3.75	6.70
05	5.00	7.95
06	6.25	9.20
07	7.50	10.45
08	8.75	11.70
09	10.00	12.95
10	11.25	14.20
11	12.50	15.45
12	13.75	16.70
13	15.00	17.95
14	16.25	19.20
15	17.50	20.45
16	18.75	21.70

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	HOUSING	1~16 PCS	PA66	COLOR:WHITE

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: C1251R 1.25mmPITCH Housing	
.X±0.35	X.±	USE:	PART NO.:
.XX±0.25	.X±	CUSTOMER	C1251R-**-A5W-P
.XXX±0.15	.XX±	APPD: 邵敬和	DWG NO.:
--	--	CHKD: 田峰	JKUN/GCCP-0592
⊕	∠	DR: 蒋建银	SCALE
	UNITS: mm		1 : 1
			SHEET
			1 / 1